

SPREAD AXLE EXTENDABLE



55SA TELE



55SA TELE



Increased camber as deck opens due to extensive deck length, offering greater hauling capabilities.




3rd axle and 4th axle attachments can be used as 3 or 4-axle close couple, 3+1 or 2+2 spread axle.



24 in. gooseneck extension standard; other optional lengths available.

55SA TELE

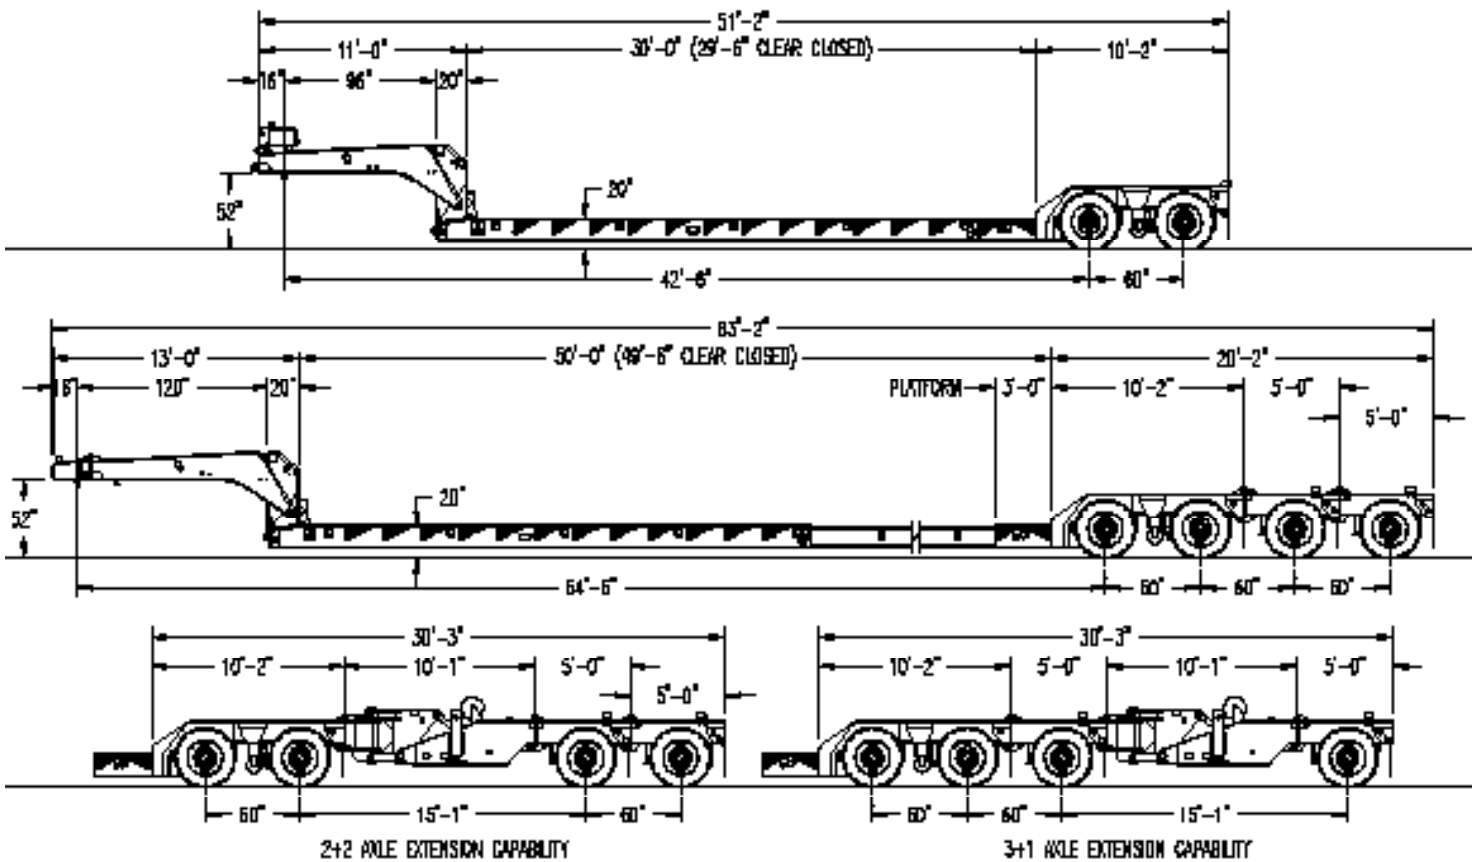

- Hydraulic Removable Gooseneck
- 96 in. Swing Radius (120 in. with Gooseneck Extension)
- Front Folding Ramps (Optional)
- 30 ft. 0 in. Deck Length Closed
- 50 ft. 0 in. Deck Length Extended
- Deck Extends Increments of 2 ft., 4 ft., 6 ft., 8 ft., 12 ft., 16 ft., 20 ft.
- 12 in. Swing/Removable Outriggers
- 8 ft. 6 in. Wide Deck and Rear Bridge
- 20 in. Loaded Deck Height
- 6 in. Loaded Road Clearance
- High Strength T1 Steel Construction
- Axles: 25,000 lb. Capacity
- **RIDEWELL** Suspension: Air Ride with Automatic and Talbert +3 in. / -3 in. Manual Control
- Tires: 275/70R22.5 (H)
- Wheels: Steel Disc Hub Piloted
- Connections Rear of Axle 3
- 3rd Axle can be Used in 3+1 Spread
- Optional 4th Axle Available
- Front Bridge Ramp
- Cambered Telescopic Beams
- Spring Parking Brake on One Axle
- **Valspar** R-Cure 800 Red or Black Paint
- Capacity: 110,000 lb. in 2 Point Rigid Load Base 6 ft.-0 in. Shorter than Deck Length, When in Extended Condition

Various Options Available Upon Request. Specifications Subject To Change Without Notice.



Industry Leading 20 in. Loaded Deck Height



Optional Rolling Bunk - Side View



Optional "RA" - Removable Rear Bridge

Dealer:



Talbert Manufacturing Inc. \ 1628 W. State Road 114 \ Rensselaer IN 47978 \ 800-348-5232 \ Fax: 219-866-7060

sales@talbertmfg.com \ www.talbertmfg.com

0315 PUB 237B