EXTENDABLE SERIES



35-55 TON MODELS



HENDABLE Inc. to 6



Increased camber as deck opens due to extensive deck length, offering greater hauling capabilities.




Air locks offer additional security and safety of the load.




Multiple gooseneck options – mechanical, hydraulic or fixed – customize your hauling needs.

EXTENDABLE

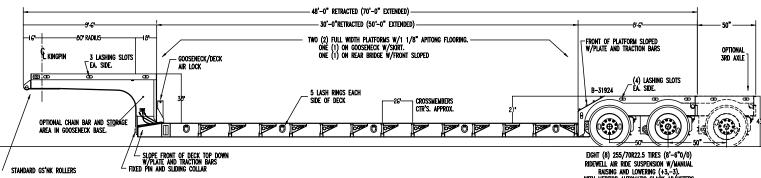

- Mechanical Removable Gooseneck
- 80 in. Swing Radius (96 in. Optional)
- Fixed Pin and Sliding Collar
- Front Folding Ramps (Optional)
- 48 ft. 0 in. Overall Closed (as a Tandem)
- 12 in. Swing/Removable Outriggers
- 8 ft. 6 in. Wide Deck and Rear Bridge
- 22 in. Loaded Deck Height
- 8 in. Loaded Road Clearance
- High Strength 100,000 psi Minimum Yield Steel
- Axles: 25,000 lb. Capacity

- RIDEWELL Suspension: Air Ride with Automatic and Talbert +3 in. / -3 in. Manual Control
- Tires: 255/70R22.5 (H)
- Wheels: Steel Disc Hub Piloted, Outboard Mounting
- Optional 3rd Axle Available
- Platforms on Gooseneck and Rear Bridge
- Front Bridge Ramp
- Cambered Telescopic Beams
- Spring Parking Brake on One Axle
- Anti-Lock Brake System
- Valspar R-Cure 800 Red or Black Paint



Various Options Available Upon Request. Specifications Subject To Change Without Notice.





Dealer:		